



INEOS

Olefins & Polymers Europe


Your partner in

**POLYOLEFIN
POWDERS**

When powder
becomes power

INEOS

THE WORD FOR CHEMICALS



We offer a full range of
high value polyolefins
solutions for all kind of
market applications.

INEOS Olefins & Polymers Europe

Eltex[®] HDPE Powders

INEOS O&P Europe is offering a wide range of HDPE materials in powder form for a wide variety of applications.

Eltex[®] HDPE powders are particularly suited for:

- / **Highly loaded colour master-batches**
- / **Higher quality compounds**
- / **Base material for chlorinated PE**
- / **Organoleptic applications**
- / **Superior Wood Plastic Composite (WPC)**

Commercial Product Range

HDPE powders

Eltex [®]	Av Particle Size µm	MFR g/10 min 190°C/2.16kg ISO 1133	Density @23°C kg/m ³ ISO 1183-1	Melting Temperature °C ISO 11357-3
A3180PN1852	300	21.5	957	131
A4009PFN1324	380	0.85	959	136
A4040P	400	3.5	943.5	128
A4090P	400	11	951	130
A5006PFN1281	350	0.6	943.5	131
B4002P	400	0.3	949	130

These products are available under various packaging forms: bags, big bags, IBC. Please contact your sales representative for more details.


Eltex® P PP Powders

A unique morphology for dedicated usage


A unique proprietary catalyst allows the production of powders with unique characteristics.

Compared to competitive PP powders (samples A and B) or to ground PP pellets, they exhibit the following advantages for the user:

- / **Very regular and spherical particles**
- / **A more regular size and shape than standard powders or ground pellets**
- / **Narrow particle size distribution mostly between 300 and 800 µm**
- / **Very little amount of fines below 200 µm**

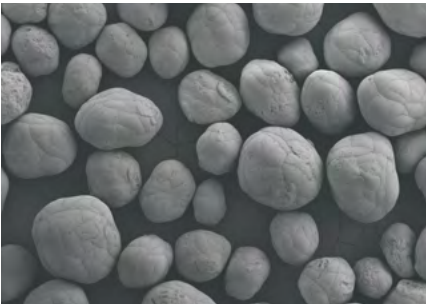

Eltex® P HV001PF



Powder sample A




Powder sample B



Ground PP pellets

Comparative Particle Size Distribution

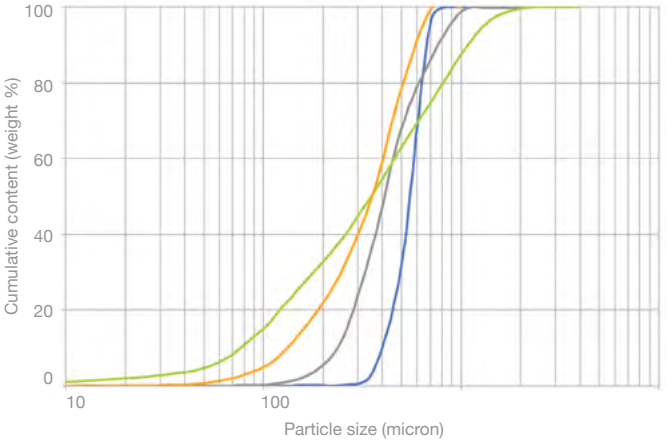

- Ground PP Pellets
- Powder Sample A
- Powder Sample B
- Eltex® P HV001PF



Uses of Eltex® P Powders and Grade Range

INEOS Eltex® P powders allow a very good dispersion of additives, pigments or fillers. For this reason they are specifically recommended for the production of concentrates and MB. They also constitute a material of choice for the production of Wood Plastic Composites (WPC) of superior quality.

Easy dispersion of elastomers and good wettability when blended with liquids are other specific advantages of Eltex® P powders.

Grade range: homopolymers of various fluidity and a highly modified random copolymer featuring a very low melting temperature.

Eltex®	Av Particle Size µm	MFR g/10 min 190°C/2.16kg ISO 1133	Density @23°C kg/m³ ISO 1183-1	Melting Temperature °C ISO 11357-3
HL001PF (*)	HPP	2.15	1600	161
HV001PF (*)	HPP	10	1600	161
HW001P	HPP	25	1700	161
HY001P	HPP	45	1700	161
KS001PF (*)	RCP	4.5	700	134

(*) F = low gels

These products are available under various packaging forms: bags, big bags, IBC. Please contact your sales representative for more details.



The choice for the
production of Wood
Plastic Composites (WPC)
of superior quality.

INEOS Olefins & Polymers Europe

PE and PP Powders

Handling and Processing

Bulk handling

Conventional silos, pumps and transfer lines can be used for Eltex[®] and Eltex[®] P powders with only minor modifications. The relatively high bulk density of INEOS powders leads to an enhanced flowability in the transfer lines that must be carefully sealed to avoid losses.

Processing

All Eltex[®] and Eltex[®] P powders have to be stabilised via addition of primary and secondary antioxidants. Eltex[®] P powders also need the addition of an acid scavenger prior to processing.

Given the smaller particle size of powders versus pellets, it may be necessary to adopt different processing conditions, depending on the equipment: throat cooling, lower first zone temperature and grooved barrel are advisable.

Melt flow index measurement of Eltex[®] P powders

Although Eltex[®] P powders can be stored for months under normal temperature conditions, they may show some degradation when molten in the melt flow indexer at 230°C. We recommend over-stabilisation of the sample to be tested by premixing the powder with the following types of antioxidants.


Additive	Type	Dose (weight %)
Primary AOx	Phenolic	0.25 - 0.5
Secondary AOx	Phosphite	0.25 - 0.5
Acid scavenger	Calcium stearate	0.05 - 0.1

Thermal Stability and Storage of Eltex[®] P Powders

Due to our specific manufacturing process, Eltex[®] P powders demonstrate good stability under normal storage conditions. The graph below shows the stability of homopolymer and ethylene random copolymer Eltex[®] P powders at 70°C. There is no change in the melt flow index of the powder after more than 20 days for Eltex[®] P KS001PF and after more than 50 days for Eltex[®] P HV001PF.

This is generally not the case with competitive powders produced with standard catalysts.

Thermal stability of powder at 70°C

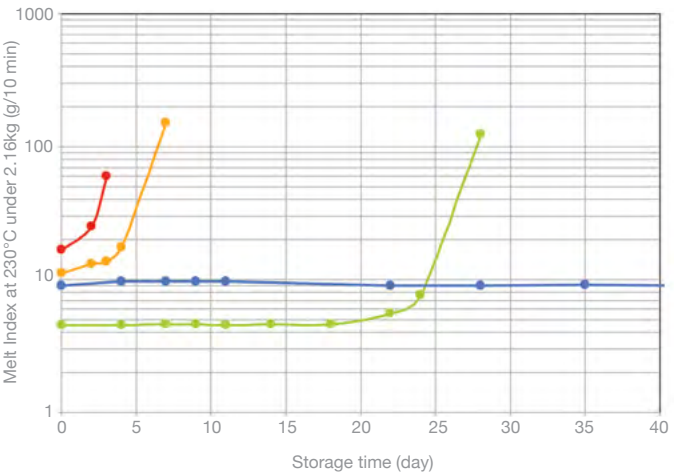

- Powder Sample A
- Powder Sample B
- Eltex[®] P HV001 PF
- Eltex[®] P KS001 PF

Special Care

Powders should be stored either in their original bags in an area with normal ventilation and protected from excessive sunlight exposure or in silos with vents. The maximum recommended temperature is 50°C.

Although Eltex[®] and Eltex[®]P powders are non-explosive as received, this does not rule out a potential explosion hazard. An explosion can occur if fines are left to accumulate over long periods of time and are exposed to an ignition source. Therefore, good housekeeping is mandatory for the safest product utilization.

All leaks in conveying equipment must be sealed and areas above and around extrusion equipment should be swept and cleaned as needed.

If the powders are conveyed pneumatically, special care should be taken to prevent dust explosion or ignition from static electricity. Silos and transport equipment should be earthed and no pipe should be made of non-conductive material. The rate of pneumatic conveying should be maintained inferior to 25 m/s. Powder concentration in air should not exceed 10g/m³ air. Storage and handling systems should be inspected regularly for possible accumulation of fines.



INEOS O&P Europe Sarralbe site

About us

INEOS is one of the world's largest chemical companies, founded in 1998. INEOS Olefins & Polymers Europe is a leading producer of olefins and polyolefins.

INEOS Olefins & Polymers Europe offers a full range of high value polyolefins solutions for market applications such as food and industrial packaging, pipe and automotive through dedicated sales, and technical service teams.

INEOS is a safe and environmentally responsible company. We are engaged in developing our sustainable agenda to improve our operations and to implement sustainable solutions for our customers. This includes products that offer lightweighting, energy efficiency, durability (extended lifetime) or conservation of resources. We care.



EXCLUSION OF LIABILITY: The information contained in this brochure, as at the date of publication, is accurate to the best knowledge and belief of INEOS Europe AG and its affiliates («INEOS») and any further information or advice provided by INEOS relating to INEOS or third party materials is also given in good faith. INEOS makes no representations or warranties, express or implied, regarding the completeness, quality or accuracy of this or any other information and any decisions you make based on the information contained in this brochure or otherwise provided by INEOS, including as to the suitability or fitness of materials for a particular purpose, are your sole responsibility. The information contained here is subject to change, and your INEOS representative will be happy to help in providing you with the latest version of this information. Please otherwise note that we advise you regularly check the validity of the information you may have already downloaded from our website. Except as required by mandatory law or as expressly provided in INEOS's standard terms and conditions of sale, INEOS accepts no liability whatsoever arising from the use of information supplied by this brochure or otherwise, or from the application, adaptation or processing of the products described herein, the use of other materials in lieu of INEOS materials or the use of INEOS materials in conjunction with such other materials. Rigidex®, Eltex®, Eltex P®, Eltex PF®, Rigidex P®, Innovene, INEOS and the breakthrough mark are all trademarks of the INEOS group, used with its permission, and are registered in a number of countries.





Please visit our website at www.ineos.com
or contact us at ineospofcsc@ineos.com

© INEOS Olefins & Polymers Europe, May 2019